

# EATON

# Powerware

## Powerware 5110 Uninterruptible Power System

500-1000 VA

### For office computer

As much as business depends on electric power, public utility power is anything but dependable. That is shocking news in an age when sensitive computer systems

lost if a computer crashes due to power problems and hours of work may be lost. The Powerware 5110 does not only offer backup when power is totally lost, it also regulates the voltage and thereby offers

have the shutdown software installed which takes over automatically saving your work and shutting down your applications without you doing anything. Once power resumes you can start exactly where you left off, without losing any data".

occupies a small footprint and can if desired be placed on its side to fit under a monitor. The 5110 is equipped with a USB port and if you choose to install the bundled shutdown software it automatically saves your files in the event of extended power outages (compatible with Windows 95/98, 2000, 2003, ME, XP)



form the core of virtually all business functions. Advances in processing capacity and miniaturization make these systems more susceptible than ever to power fluctuations—and make system crashes and data losses more costly than ever. In business office environments, the awareness towards power protection needs has increased, leading to the protection of server farms and individual servers. However individual computers are still often left unprotected. This means that individual work will still be

protection against five of the nine most common power problems faced in an office environment.

"With Powerware 5110 you can continue to write, make your presentations, update your accounts, surf the net or whatever else you do, even while others are re-booting their computers due to disturbance in utility power. And in the event of a total blackout, the unit runs on battery so that you have time to save your work. Or you can

### Three power ratings

The Powerware 5110 comes in three power ratings 500 VA, 700 VA and 1000 VA covering the needs for effective single computer protection. All models have four battery backup protected outlets as well as four "surge-protection" only outlets (for printers, faxes and other peripheral equipment) not needing battery backup. The Powerware 5110

### All you need included in the box

All models come bundled with the shutdown software, USB cable and two IEC-IEC load cables as well as a RJ-11 cable to protect your Tele/DSL line from surges.



# Technical Specifications

Rating	Powerware 5110 500 VA	Powerware 5110 700 VA	Powerware 5110 1000 VA
Part number	103004261-5501	103004262-5501	103004263-5501
Capacity (VA/Watts)	500/300	700/420	1000/600
Dimensions W*D*H ( mm)	87*260*270 mm	87*260*270 mm	87*384*270 mm
Weight (kg)	6 kg	8 kg	12 kg
Input connection	IEC320/ 10A	IEC320/10A	IEC320/10A
Output connection	4*IEC320 10A + 4 IEC320 10A surge only	4*IEC320 10A + 4 IEC320 10A surge only	4*IEC320 10A + 4 IEC320 10A surge only
Typical runtime	3 min full load 8 min half load	3 min full load 8 min half load	5 min full load 15 min half load
Bundled with	(2) IEC-IEC cables Software& USB cable RJ 11 cable	(2) IEC-IEC cables Software& USB cable RJ 11 cable	(2) IEC-IEC cables Software& USB cable RJ 11 cable
<b>Operational</b>			
Nominal Input voltage (VAC)	230 VAC		
Input voltage range	178-275 VAC		
Operating frequency	50/60 Hz auto sensing		
Nominal Output voltage	230 VAC		
Output voltage regulation	230 V +/- 10%		
Overload capacity	130%+/- 10% immediate shutdown 105% shutdown after 5 min		
Efficiency	95%, normal mode		
<b>User interface</b>			
LED	UPS On, UPS on Battery, Overload,		
Standard communication ports	USB		
<b>Environmental</b>			
Operating temperature	0°C - +40 °C		
Altitude	< 3000 m		
Audible noise at 1 meter	< 40 dB		
<b>Certification</b>			
Markings	CE		

## Backup time table

Load	5110	5110	5110
	500 VA	700 VA	1000 VA
50W	40 min	50 min	80 min
100W	17 min	20 min	60 min
150W	10 min	14 min	40 min
200W	6 min	9 min	25 min
250W	4 min	7,5 min	20 min
300W	3 min	6 min	17 min
350W		4 min	14 min
400W		3 min	12 min
450W			10 min
500W			8 min
550W			6 min
600W			5 min

Note! Runtimes are approximate and may vary with equipment, configuration, battery age temperature.

Due to continuing product improvement programs, specifications are subject to change without notice.

Powerware®, Advanced Battery Management, LanSafe, PowerVision, and FORESEER are trademark(s) of Eaton Power Quality Corporation. © 2005 Eaton Corporation

Mailing address:  
Powerware Products and Services,  
Marketing  
Po Box 54, 02921 Espoo, FINLAND  
Tel: +358 9 452 661  
Fax: +358 9 452 66396  
emea@powerware.com  
http://www.powerware.com

DENMARK  
Tel: +45 3686 7910  
denmark.sales@powerware.com

FINLAND  
Tel: +358 9 452 661  
finland.sales@powerware.com

FRANCE  
Tel: +33 1 60 12 74 00  
powerware.france@powerware.com

GERMANY  
Tel: +49 7841 6040  
info.germany@powerware.com

ITALY  
Tel: +39 02 66 04 05 40  
info@powerware.it


NORWAY  
Tel: +47 23 03 65 50  
norway.sales@powerware.com

POLAND  
Tel: +48 22 331 85 24  
poland.sales@powerware.com

RUSSIA  
Tel: +7 095 787 2890  
russia.sales@powerware.com

SWEDEN  
Tel: +46 8 598 940 00  
sweden.sales@powerware.com

UNITED KINGDOM  
Tel: +44 1753-608 700  
powerware.help@powerware.com

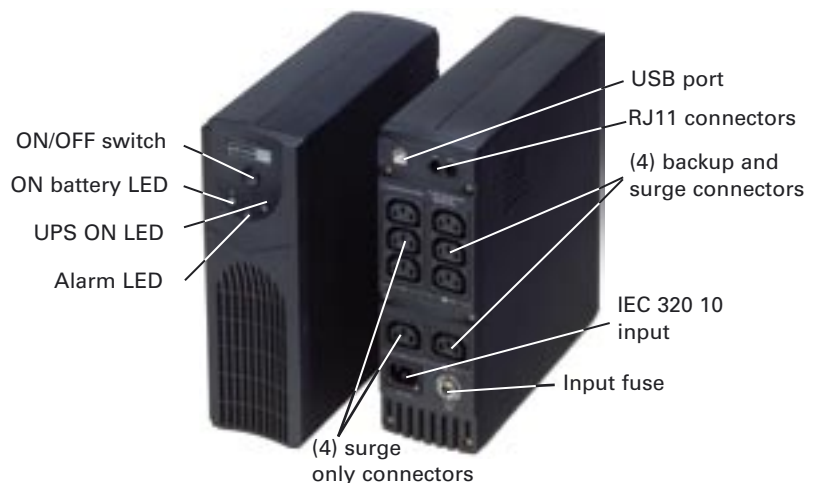

# Powerware